



# WASP PROTECT

Portal > Knowledgebase > FAQs > Power Supply specifications for multiple products

---

## Power Supply specifications for multiple products

Scott Kircher - 2018-01-09 - in FAQs

The correct power supply must be used for electronic equipment. Use of power supplies with incorrect specifications can have effects as mild as erratic behavior, and as severe as burning out the equipment.

Printers with wrong power supplies have been known to power on but not operate, exhibit blinking lights when powered on or attempting to print, or other odd behavior.

A printer's power switch should be in the Off position before plugging in the power supply plug. This will prevent sparking at the printer's power jack.

Timeclocks with wrong power supplies have been known to power on but not communicate over the network, show an unchangeable wrong date, etc.

Note: Just because a plug physically fits into a jack doesn't mean it's the correct adapter; the volts and amps must match as well.

Model Number, Specs All barrel connectors have positive (+) tip.	picture
---	---------

B1100,  
B1000  
timeclocks  
5V 2.0A  
5.5mm



B2000  
timeclock  
5V 0.8A  
5.5mm  
(currently  
shipping)  
5V 2A  
5.5mm  
(early  
shipments)



BC100,  
RF200,  
HD300  
timeclocks  
12V 1.5A  
5.5mm



HC1,  
WPA1000,  
WPA1200,  
WDT3200  
series  
mobile  
devices  
5V 3.0A  
3.8mm



DR2,  
WDT60,  
WDT90  
mobile  
devices  
5V  
1.6-2.0A  
USB Micro  
B




WDT60  
cradle,  
WDT90  
cradle  
mobile  
device  
cradle  
5V 3A  
5.5mm



RP200,  
RP300H,  
RP330,  
WRP8055  
receipt  
printers  
24V 1.5A  
round with  
3 prongs



WPL4MB,  
WPL4ML  
label  
printers  
12V 1.0A  
3.8mm

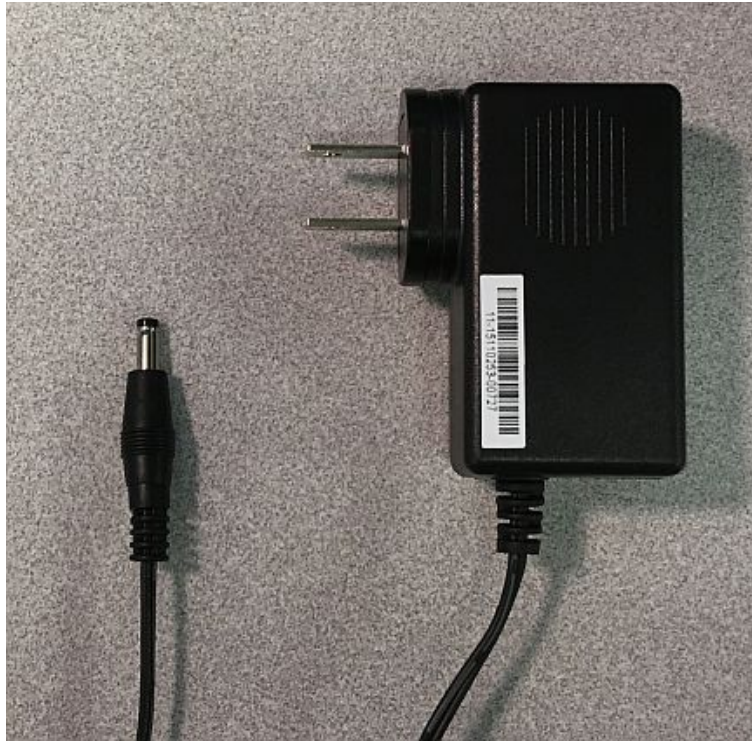

WPL25,  
WHC25  
label  
printers  
24V 2A  
5.5mm



WPL205M,  
WPL304  
label  
printers  
24V 2.5A,  
5.5mm





WPL308M,  
WPL305,  
WPL205  
label  
printers  
24V 3.75A  
5.5mm  
(4.75A will  
work)



WPL406,  
WPL608,  
WPL610,  
WPL612,  
WPL614M  
label  
printers  
power cord  
only (no  
adapter).  
The power  
supply  
module is  
contained  
within the  
printer  
housing.



<p>WWS450 scanner 5V 2.0A 3.5mm</p>	
<p>WWS550, WWS500, WWS800, DT10 mobile devices &amp; scanners 5V 1.2A 3.5mm (2A will work)</p>	

Related Pages

- [Timeclock display shows Jan 1, 2070, and WaspTime reports its time as 8/18/2103, cannot be updated](#)